



#5

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of

Noel MCDONALD, et al.

Attorney Docket No. Q67567

Appln. No.: 10/003,071

Group Art Unit: 2816

Confirmation No.: 4872

Examiner: Not yet assigned

Filed: December 06, 2001

For: PHASE SHIFTER


SUBMISSION OF PRIORITY DOCUMENT

Commissioner for Patents
Washington, D.C. 20231

Sir:

Submitted herewith is a certified copy of the priority document on which a claim to priority was made under 35 U.S.C. § 119. The Examiner is respectfully requested to acknowledge receipt of said priority document.

Respectfully submitted,


David J. Cushing
Registration No. 28,703

SUGHRUE MION, PLLC
2100 Pennsylvania Avenue, N.W.
Washington, D.C. 20037-3213
Telephone: (202) 293-7060
Facsimile: (202) 293-7860

Enclosures: Australia PR 1963

Date: March 19, 2002



Q67567
1 of 1



Patent Office
Canberra

I, JONNE YABSLEY, TEAM LEADER EXAMINATION SUPPORT AND SALES hereby certify that annexed is a true copy of the Provisional specification in connection with Application No. PR 1963 for a patent by ALCATEL filed on 08 December 2000.

WITNESS my hand this
Fourteenth day of December 2001

J. Yabsley

JONNE YABSLEY
TEAM LEADER EXAMINATION
SUPPORT AND SALES



P/00/009 28/5/91
Regulation 3.2

AUSTRALIA

Patents Act 1990

PROVISIONAL SPECIFICATION

Invention Title:
"PHASE SHIFTER"

This invention is described in the following statement:

Field of Invention

This invention relates to antennas and in particular to an arrangement to electrically down-tilt the electromagnetic wave pattern associated with a transmit antenna array, or electrically re-orient a receive antenna array.

5 Background of Invention

It is sometimes desirable to adjust the orientation of the electromagnetic wave pattern of a transmit antenna array, particularly a downward adjustment, typically 0 degrees to 15 degrees below horizontal, when the antenna is located at a higher altitude than other antennas that communicate with the transmit antenna array.

- 10 The downward adjustment of the radiation pattern alters the coverage area and may enhance communication with mobile users situated in shadowed areas below the transmit antenna array.

Besides actually mechanically tilting the entire antenna assembly, it is known to electrically down-tilt the radiation pattern by controllably varying the
15 relative phase or phases between two or more radiating elements of the antenna array.

One known method by which the relative phase between two or more radiating elements can be changed is to change the relative lengths of respective transmission lines connecting the antenna's common feed point to each element of
20 the antenna array. Typically, various predetermined lengths of jumper cable are provided which are selectively connected between the common feed and each element to obtain a desired down-tilt. The jumper cables include co-axial connectors to facilitate connection. Furthermore, if stripline is used to connect the common feed point to the respective elements of the antenna array, some form of
25 transition means is required to couple the jumper cable's co-axial connections to the stripline. A disadvantage of this known method is that it is expensive, unreliable and susceptible to the generation of intermodulation products.

Another known method by which the relative phase between two or more radiating elements can be changed is to change the propagation velocity of the
30 transmission line connecting the common feed point to at least some of the elements of the antenna array. Typically, this latter method is achieved by

selectively changing the dielectric constant of the transmission line dielectric. If the transmission line is in the form of a conductive strip, the propagation velocity thereof is changed by introducing a dielectric material between the strip and its associated ground plane.

- 5 It is, however, well understood that the introduction of dielectric material under such a conductive strip causes the strip's normal impedance to be disturbed. For example, if a conductive strip having a certain width is spaced above a ground-plane at a certain distance such as to present a 50 ohm impedance, the introduction of a dielectric material between the conductive strip and the ground-
10 plane will reduce the value of this impedance to a value that depends upon the effective dielectric constant of the dielectric material. The resulting impedance mismatch would cause a degradation of return-loss performance of the antenna.

- Australian Patent No. 664625 discloses an arrangement of an adjustable phase shifter comprising dielectric phase shifter elements moveably interposed
15 between conductive strips that couple radiating elements, and a common ground-plane. The phase shifter elements are of a characteristic configuration which avoids disturbing the normal impedance during adjustment. This known arrangement, however, requires that respective phase shifter elements be located between each active strip and the conductive ground-plane. Such an arrangement
20 imposes constructional disadvantages as well as limitations to the range of phase shift produced, which consequently imposes limits to the range of tilt.

- Australian Patent Application No. 14278/99 discloses an arrangement of an adjustable phase shifter comprising a transmission line in the form of a printed circuit board supporting conductive tracks on one side thereof, and a ground-
25 plane spaced below the other side thereof. A moveable dielectric element is arranged adjacent the conductive tracks. The moveable dielectric element is provided with a plurality of teeth along opposite edges for selectively overlapping the conductive tracks. This arrangement provides an adjustable phase shifter having stable impedance characteristics and a relatively large phase shift as
30 compared with the prior art.

New radio frequency bands have been allocated to provide more channels for the rapidly increasing cellular mobile telephone usage. Instead of having separate base station antennas for different bands, it is desirable to provide multiple-band antennas. For example, it may be desirable to combine the 1710 –

- 5 1880 MHz DCS band with the 1920 – 2170 MHz UMTS band, with an overall bandwidth of 460 MHz, which is wider than previous systems. In order to electrically down-tilt the radiation pattern of such a multiple band antenna, a phase shifter is required that has a wider frequency range than the aforementioned prior art phase shifter arrangements can accomplish.

10 Summary of Invention

It is an object of the present invention to provide an adjustable radio frequency phase shifter arrangement having a wider operating frequency range than prior art arrangements.

- According to the invention there is provided a phase shifter element
- 15 arranged to selectively vary the effective dielectric constant of a section of transmission line thereby changing the propagation velocity of said transmission line and varying the phase of signals of desired frequencies or frequency range passing through said transmission line, said phase shifter element comprising a movable planar dielectric member of predetermined dielectric constant adjacent
- 20 said transmission line, said planar dielectric member being provided with three or more discrete interactive dielectric segments extending from at least one edge thereof to moveably overlap the adjacent transmission line, wherein optimum dimensions of each said interactive segment and optimum widths of gaps defined by opposite edges of adjacent segments are determined by computer optimisation
- 25 means, such that the aggregate reflection of said signals passing through said transmission line is minimised.

- The present invention is based on the concept that, as phase shift is generally proportional to the length of added or inserted dielectric, if the total dielectric length required for one particular phase shift is broken up into a plurality
- 30 of segments, then it is possible to optimise all of the lengths and spacings of those segments in such a way as to reduce the aggregate reflection at several

frequencies, or over a range of frequencies. Thus for a specified frequency range and for one required electrical phase shift, computer optimisation is used to determine the optimum lengths of a plurality of dielectric segments and the spacings between them. The same procedure is repeated for other phase shift values to produce an optimum profile for the movable dielectric element.

In order that the invention may be readily carried into effect, embodiments thereof will now be described in relation to figures of the accompanying drawings, in which:

Brief Description of the Drawings

Figure 1 is a plan view of a planar dielectric element provided with a plurality of characteristic spaced segments extending therefrom.

Figure 2 is a side view of Figure 1.

Figure 3 is a plan view of a phase shifter arrangement incorporating the dielectric element of the present invention.

Figure 4 is a side view of the arrangement shown in Figure 3.

Figure 5 is a schematic layout of an antenna array incorporating the phase shifter arrangement shown in Figure 3.

Figure 6 is a plan view a further embodiment of a phase shifter arrangement incorporating the dielectric element of the present invention.

Figure 7 is a schematic layout of an antenna array incorporating the phase shifter arrangement shown in Figure 6.

Referring to Figures 1 and 2 of the drawings there is shown a planar dielectric element 1 comprising a rectangular body section 2 and five segments, 3,4,5,6 and 7 extending from a major edge of body section 2. The segments are separated by four air gaps 8,9,10 and 11. The segments lie in the same plane as the body section. To improve structural rigidity of the dielectric element, the air gaps may be replaced by a dielectric material of a different dielectric constant to that of the material of the dielectric element 1. Alternately, the air gaps may be replaced by thinner portions of the same material as the dielectric element.

As shown in Figures 3 and 4, dielectric element 1 is slidably mounted and adjacent to the top surface of a PCB distribution element comprising a planar

- dielectric circuit board 12 supporting a conductive track 13 on a first surface 12a thereof. The conductive track and the dielectric circuit board form a transmission line whose distal ends terminate at respective terminals T and B. The distribution element is supported in a spaced relationship with a conductive ground plane 14.
- 5 The dielectric circuit board's second surface 12b and the ground plane face one another. Alternately, the second surface of the circuit board and the ground plane can be contiguous (not shown). The movable dielectric element 1 is supported above the first surface 12a of circuit board 12 in a linearly slidable manner by two parallel rods 15, 16 attached to the ground plane. It will be understood that the
- 10 movable dielectric element will have the effect of varying the phase whether it is adjacent the first surface 12a or the second surface 12b, although the phase shift achieved by each arrangement will be different; the movable dielectric element will have a greater effect when adjacent the second surface 12b, i.e., interposed between surface 12b and the ground plane 14.
- 15 The greater the number of segments extending from the body section of the element 1, the lesser the aggregate signal reflection caused by the dielectric element. However, the greater the number of segments requires a greater overall length of the element. But the length of the element has to be taken into account when operatively associating the element with an antenna array, to avoid
- 20 constructional problems. Therefore, the choice of the number of segments is a compromise between electrical performance and practical dimensions.
- If, as shown in Figure 1, the element 1 has five segments (and correspondingly four gaps) then an equivalent electrical circuit comprises nine equivalent transmission line sections in series. For one specific phase shift and
- 25 desired frequency range, the lengths of those nine elements are adjusted (optimised) by using known commercially available radio frequency circuit analysis and optimisation software, to simultaneously achieve the desired phase shift and minimise the aggregate signal reflection due to the presence of the dielectric segments. The lengths of the equivalent transmission lines then represent the
- 30 optimum lengths of the dielectric segments, and the optimum width of the gaps, adjacent to or overlapping the physical transmission line conductor for that

particular phase shift. The same process is then repeated again and again for different phase shift values desired. Then, to construct the means by which a linear transverse movement of the dielectric element is converted to a variable phase shift, the various lengths of dielectric segments and widths of gaps overlapping the transmission line are joined to produce the required profiles of the segments. From these profiles, information is derived in a known manner and used in suitable numerically controlled cutting equipment to produce the complex shaped segments of the dielectric element.

Referring to Figure 6 of the drawings there is shown a second embodiment of the invention for use with a three section antenna array (see Figure 7). The planar dielectric element 17 is provided with segments that extend from opposite major edges of the dielectric element's body section. A movable dielectric element 17 is slidably mounted and adjacent to one surface of a planar PCB distribution element 18 that supports two conductive tracks 19 and 20. The conductive tracks and the dielectric circuit board form a transmission line network for splitting a radio frequency signal applied to a signal input terminal I into three paths that terminate respectively in three terminals T, B and C for feeding the input signal to the top (T), Bottom (B) and Centre (C) sections of a three section antenna array (Fig. 7). The distribution element 18 is supported in a spaced relationship with a conductive ground plane 20; the planar dielectric circuit board's other surface and the ground plane facing one another. The movable dielectric element 17 is supported in a linearly slidable manner by two parallel rods 21 and 22 attached to the ground plane 20.

It will be understood that the arrangement by which the dielectric element can be selectively moved in relation to the transmission line to vary the phase of signals is not limited to the preferred arrangement of parallel rods used in the embodiments described in relation to Figures 1 and 6. Various known arrangements could be adapted, such as, for example, rotational arrangements. Further, remotely controlled servomechanisms could be adapted to move the dielectric element.

The claims defining the invention are as follows:

1. A phase shifter element arranged to selectively vary the effective dielectric constant of a section of transmission line thereby changing the propagation velocity of said transmission line and varying the phase of signals of desired frequencies or frequency range passing through said transmission line, said phase shifter element comprising a movable planar dielectric member of predetermined dielectric constant adjacent said transmission line, said planar dielectric member being provided with three or more discrete interactive dielectric segments extending from at least one edge thereof to moveably overlap the adjacent transmission line, wherein optimum dimensions of each said interactive segment and optimum widths of gaps defined by opposite edges of adjacent segments are determined by computer optimisation means, such that the aggregate reflection of said signals passing through said transmission line is minimised.
2. A phase shifter element as claimed in claim 1, wherein said gaps are air gaps.
3. A phase shifter element as claimed in claim 1, wherein said gap is at least partly filled by material whose dielectric constant is different to that of dielectric constant of said dielectric segments.
4. A phase shifter element as claimed in claim 1, wherein said gap is at least partly filled by the same material as that of the dielectric segments, and wherein the thickness of the filling is less than the thickness of said segments.
5. A phase shifter element as claimed in any one of the preceding claims, wherein said optimisation means comprises a radio frequency analysis and optimisation computer program to calculate data for controlling cutting equipment means to produce said dielectric segments having optimum dimensions and optimum widths there between.
6. A phase shifter element as claimed in any one of the preceding claims, wherein said planar dielectric member comprises a rectangular body section, said dielectric segments extending from a major side thereof, and wherein the segments and the body section lie in the same plane.

7. A phase shifter element as claimed any one of the preceding claims, wherein said transmission line is operatively associated with an antenna array.
8. A phase shifter as claimed in claim 7, wherein said transmission line comprises a conductive track of predetermined electrical length supported on
- 5 planar dielectric circuit board, said circuit board being mounted in a spaced relationship with a ground plane member.
9. A phase shifter as claimed in claim 8, wherein said movable dielectric member is interposed between said dielectric circuit board and said ground plane member.
- 10 10. A phase shifter as claimed in claim 8, wherein said movable dielectric member is disposed above said dielectric circuit board and remote from said ground plane member.
11. A phase shifter as claimed in any one of claims 8 to 10, including adjustment means for selectively moving said dielectric element in relation to said
- 15 transmission line such that said segments and said gaps movably overlap said transmission line to vary the phase of signals passing through said transmission line.
12. A phase shifter as claimed in claim 11, wherein said adjustment means includes a remotely controllable servomechanism.
- 20 13. An antenna array incorporating a phase shifter as claimed in any one of the preceding claims.
14. An antenna array as claimed in claim 13, arranged as a multiple-band antenna array.
15. A phase shifter substantially as herein described with reference to Figures 1
- 25 to 7 of the accompanying drawings.

DATED THIS FIFTH DAY OF DECEMBER 2000

ALCATEL

Freddie's Carter Smith Boodle



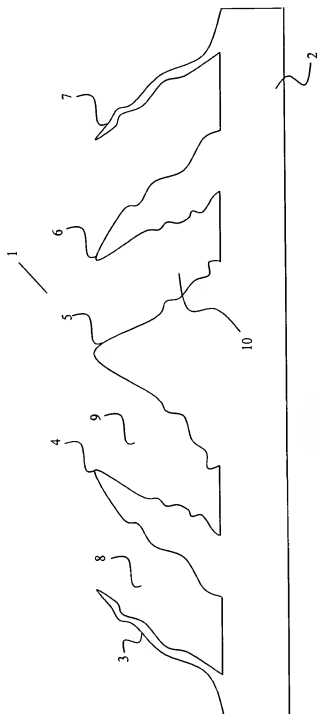


FIGURE 1



FIGURE 2

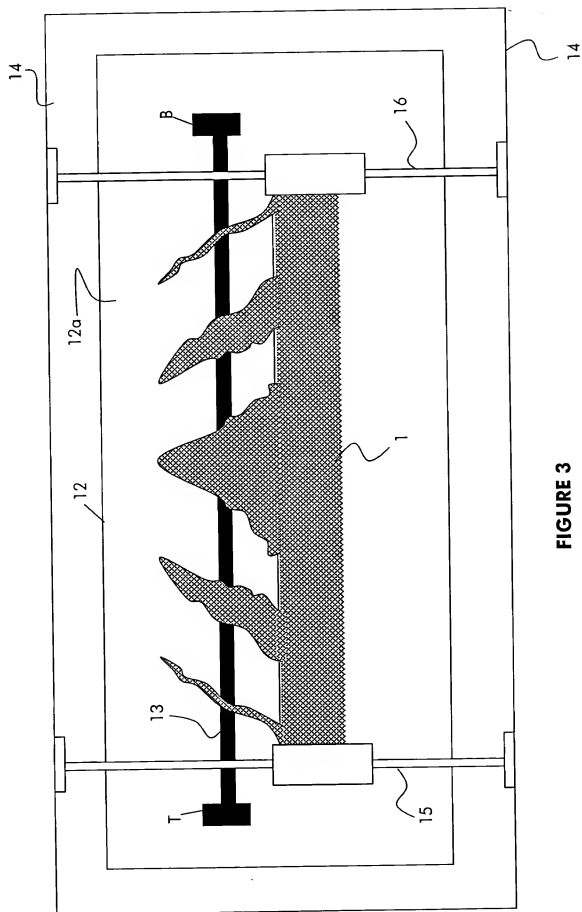


FIGURE 3

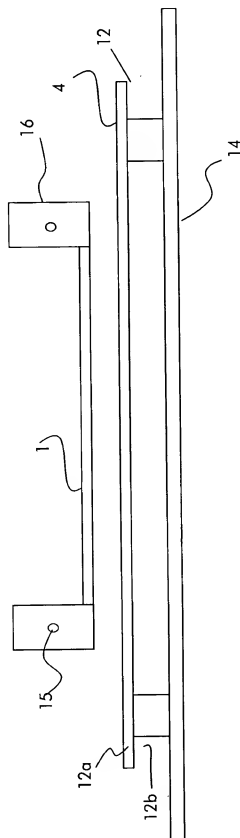


FIGURE 4

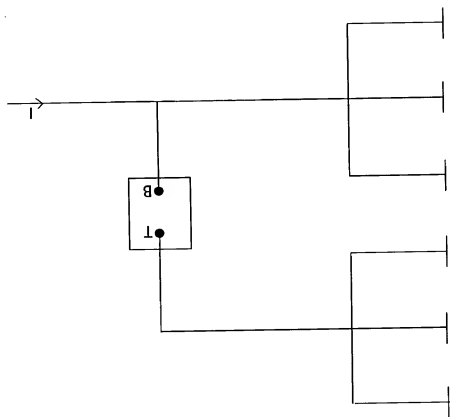


FIGURE 5


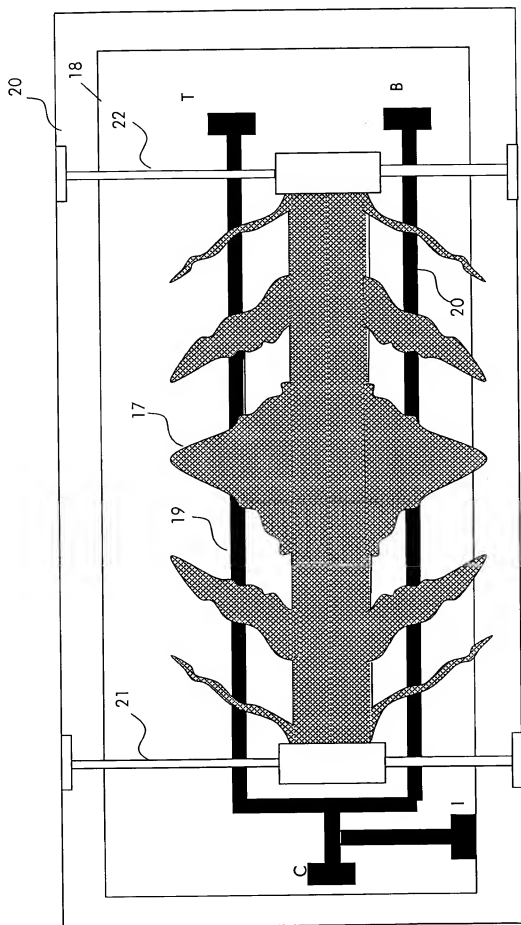


FIGURE 6

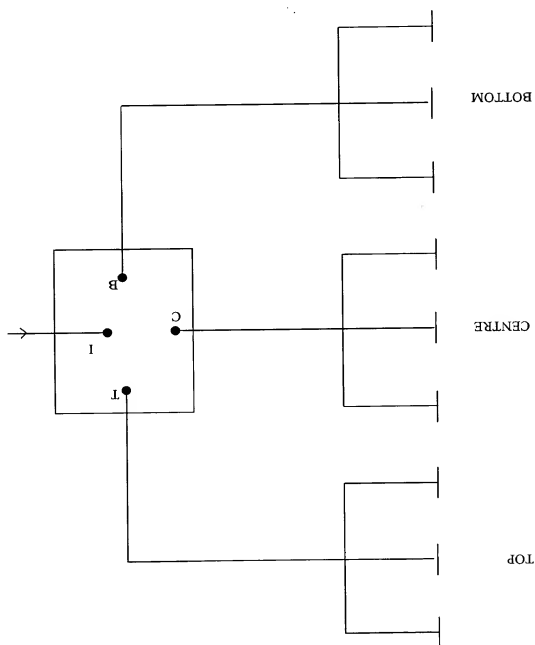

ABSTRACT

A phase shifter element for selectively varying the phase of signals of desired frequencies or frequency range passing through an adjacent transmission line associated with, for example, an antenna array to electrically down-tilt the array's electromagnetic wave pattern. The phase shifter element comprises a planar dielectric member having at least three discrete co-planar interactive segments extending from an edge thereof and arranged to movably overlap the adjacent transmission line to vary its dielectric constant. Optimum dimensions of each interactive segment and optimum widths of gaps defined by opposite edges of adjacent segments being determined by a computer optimisation program, such that the phase shifter element achieves a wide operating frequency and minimum aggregate reflection.